

Temperature Controlled Soldering Gun with Solder Feeding System!



No.951

No.952



Iron Holder (C1437)

Features

- Available for your Hakko 701, 702B, 926, 927, 928, 936, or 937.
- ESD safe by design.
- Compact design and light weight.
- Easy positioning for the solder feeding.
- A Variety of tip type.

Specifications


Model No.	951	952
Type	M	L
Power Consumption	AC24V—50W	
Temperature Range	200~480°C	
Tip to Ground Resistance	Under 2 Ω	
Tip to Ground Potential	Under 2mV (Typ. 0.6mV)	
Heating Element	Ceramic Heater	
Standard Tip	No.900M-T-S10	No.900L-T-B
Standard Guide Nozzle	Guide Nozzle for ø1.0 (B2654)	
Usable Solder Dia.	ø0.6, 0.8, 1.0, 1.2, 1.6	
Outer Dimensions	180(H) x 170(W)	
Weight (w/o Cord)	Approx.177g	Approx.187g

Optional Parts


Part No.	Name/Specifications
B2652	Guide Nozzle for ø 0.6mm/ESD
B2653	Guide Nozzle for ø 0.8mm/ESD
B2654	Guide Nozzle for ø 1.0mm/ESD
B2655	Guide Nozzle for ø 1.2mm/ESD
B2656	Guide Nozzle for ø 1.6mm/ESD
A1321	Heating Element
C1437	Iron Holder

Set Up


HAKKO 951-952

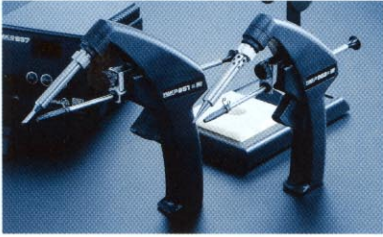

Iron Holder(C1437)



HAKKO 936



HAKKO 937



HAKKO 701



HAKKO 702B



HAKKO 926*



HAKKO 927*



HAKKO 928




(*Discontinued Products)

Replacement Tip


951

951 tip out dia. ϕ 6.5mm


900M-T-1.6D



900M-T-2.4D




900M-T-3.2D




900M-T-S3


New



900M-T-SB




900M-T-B/900M-T-BF2*




*BF2 is tinned a distance of 2mm from the end of the tip.


900M-T-0.8C



900M-T-2C/900M-T-2CF*




900M-T-3C/900M-T-3CF*




900M-T-S10*

New




900M-T-4C/900M-T-4CF*




900M-T-S11*


New



900M-T-K




900M-T-S4




952

952 tip out dia. ϕ 8.5mm


900L-T-B




900L-T-2B



900L-T-2.4D




900L-T-3.2D




900L-T-S1


New




900L-T-2C/900L-T-2CF*




900L-T-3C/900L-T-3CF*




900L-T-4C/900L-T-4CF*



900L-T-5C/900L-T-5CF*



900L-T-K



* For heavy duty soldering HAKKO recommends the 952 gun with heavier tips.

CAUTION

Use only genuine replacement tips for HAKKO 951,952. The tips for HAKKO Dash are not available to use. * These tips are tinned flat only.

* Due to continuing product improvement efforts, specifications and external appearance are subject to change without notice.
* Copyright HAKKO Corporation. All rights reserved.

CA00102AB001 2001.1

สอบถามรายละเอียดเพิ่มเติมได้ที่ มีจำหน่ายตามร้านอะไหล่อิเล็กทรอนิกส์ทั่วไป
บริษัท สหรุ่งโรจน์ (ประเทศไทย) จำกัด
 1034 ถนนเจริญนคร แขวงบางลำภูกลาง เขตคลองสาน กรุงเทพฯ 10600
 โทร. (02) 438-7783 (อัตโนมัติ) แฟกซ์. (02) 438-4166, 862-6740
<http://www.srt.co.th> E-mail. srt@srt.co.th

แผนกต่างจังหวัด และ พก. กรุณาติดต่อสาขาวัตถุดิบ
 โทร. (02) 225-7076 แฟกซ์. (02) 225-2979
สาขาวัตถุดิบ 67,69,71,73 ถนนจักรวรรดิ แขวง/เขตสัมพันธวงศ์ กรุงเทพฯ 10100
 โทร. (02) 225-7070 (อัตโนมัติ), 622-7311-5
 แฟกซ์. (02) 225-2979, 222-0052